

SERIES

ML40-1000



Standard Accessories:

- 15m 4-core oil resistance electric cable with 4- pin plug
- 20m wear resistance high pressure hose with Stainless steel fittings
- High pressure dump gun with stainless-steel lance and nozzle/rotating nozzle
- Water seal and O-ring kit
- Booster pump impeller kit
- Fuse
- User manual book with part list

Optional Accessories:

- Extension hoses with connectors
- Extension electric cables
- Drain and pipe cleaning nozzles
- Spare part kits
- High Pressure protection clothing, helmet with face shield and earmuff
- Hose protection

Marlin

High Pressure Water Blaster 1000bars

Marlin ML40-1000 Series is a professional heavy-duty high-pressure water blaster equipped with a high-performance industrial duty pump with a heavy-duty crank shaft design, ceramic pistons and electric motors equipped with VFD or soft start panels and a wide range of input power and pressures to perform optimally for your requirements. And with its compact and simplest design – aimed to reduce the Total Cost of Ownership (TCOO). These water blasters are designed to reduce the complexity of maintenance without compromising the quality and durability for heavy duty usage under the toughest conditions.



High Pressure
Cleaning companies



Building Sites
and boat yards



Iron and Steelworks
and engineering firms



F&B



Oil & Gas

SERIES

ML40-1000

Highlights

- Heavy duty stainless steel structured frame
- Triplex tungsten carbide plunger pump
- 36KW Permanent Magnet Synchronous Motor with Super Compact Size
- Pressure regulated via VFD controlled
- Stainless steel pressure gauge with glycerin
- 2-Stage water filter system with replaceable cartridge
- Control panel with emergency Stop
- Stainless steel pressure gauge with glycerin
- Extra-lightweight & compact size, suited for use in confined space environment

Contact us



Email

sales@olsomens.com

Website

www.olsomens.com

Marlin

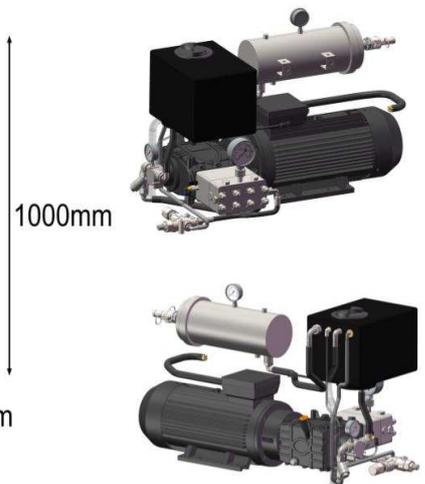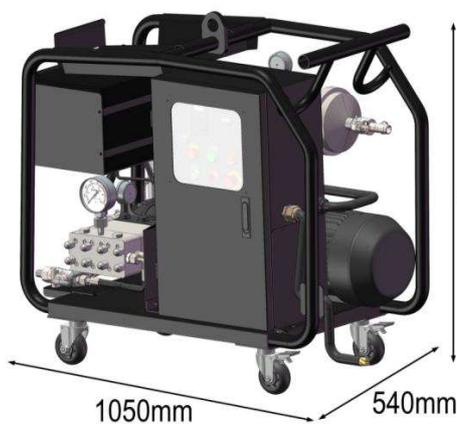

Standard Accessories



20K PSI Dump gun



HP Hose 20m



Nozzle

Technical Specifications

	ML40/1000-15	ML40/1000-18
Pump Pressure (Bar/Psi)	1000/14504	1000/14504
Flowrate (liter per minute)	15	18
Max inlet temperature (°C)	35	35
Power Voltage/phase	380V/3ph	440V/3ph
Power Frequency (hz)	50	60
Power consumption (HP/kW)	30/22	35/28
Motor Class	IP 55/F	IP 55/F
Pump RPM	1450	1750
Load Current (A)	40	47
Weight (Kg)	480	480
Dimension (mm)	1050 x 540 x 1000	1050 x 540 x 1000